

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 April 2003 (17.04.2003)

PCT

(10) International Publication Number
WO 03/032606 A1

(51) International Patent Classification⁷: **H04L 29/06**

(21) International Application Number: PCT/IB02/04566

(22) International Filing Date: 7 October 2002 (07.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0124261.9 9 October 2001 (09.10.2001) GB

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NIEMI, Aki** [FI/FI];
Otsolahdentie 18 A 26, FIN-02110 Espoo (FI).

(74) Agents: **WILLIAMS, David, John** et al.; Page White &
Farrer, 54 Doughty Street, London WC1N 2LS (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: **EVENT RELATED COMMUNICATIONS**

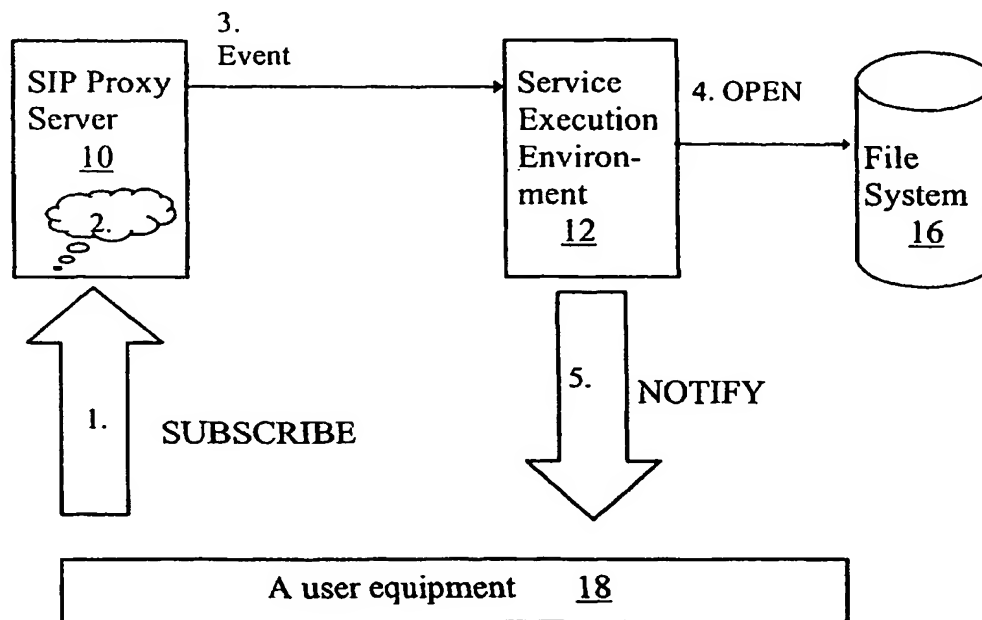

(57) Abstract: A method in a communication system wherein a requestor (18) signals a request (1) for a service associated with an event. The request includes a first identifier for identifying the requested event and a second identifier for identifying the origin of the event. An executable set of instructions is then selected based on the first and second identifiers. Communications associated with the specific event is then controlled by means of the selected executable set of instructions. A communication system and a service execution entity (12) operating in accordance with the method is also disclosed.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Event related communications

Field of the Invention

5 The present invention relates to communications in association with user specific events, and more particularly, but not exclusively, to provision of services by a user to other users of a communication system.

10 Background of the Invention

A data communication system is arranged for communication of data between two or more entities such as user terminal equipment and/or other nodes associated with the system. The
15 communication may comprise, for example, communication of voice, electronic mail (email) and text messages, multimedia content and so on. A communication system may provide data communication over a fixed line or wireless interface for user terminals or other nodes. An example of systems carrying
20 wireless communication is the public land mobile network (PLMN). An example of the fixed line networks is the public switched telephone network (PSTN).

A communication system typically operates in accordance with
25 a given standard or specification which sets out what the various elements of the system are permitted to do and how that should be achieved. For example, the standard or specification may define if the user, or more precisely, user equipment or terminal is provided with a circuit switched
30 service or a packet switched service or both. Communication protocols and/or parameters which shall be used for the connection are also typically defined. For example, the

manner how communication shall be implemented between the user equipment and the elements of the communication network is typically based on a predefined communication protocol. In other words, a specific set of "rules" on which the communication can be based on needs to be defined to enable communication by means of the communication system.

The communication systems may be provided with various different functions. These functions can be divided in different categories. A category comprises functions that relate to the actual carrying of the communication in the system. Another category can be seen as being formed by control or management functions such as the control of various services. The various functions of the communication systems may have been developed quite independently from each other and may use different protocols in different communication systems. In general terms, a communication system can be described by a model in which the functions of the system can be seen as divided in several hierarchically arranged function layers, such as a service layer, an application layer and a transport layer.

For example, in communication environments such as those based on the Internet Protocol (IP) or the Session Initiation Protocol (SIP) or the current third generation (3G) communication network architectures it is assumed that various server entities are used for handling of provision of different communication services and other functions of the communication system. In such communication systems the communication connections may not be based on a "circuit" between the communicating nodes, but the messages may rather be transported as packets that are provided with an address.

Hence the name packet switched systems. The server entities and the user equipment may communicate with each other based on appropriate protocol providing such a connectionless operation.

5

The internet protocol (IP) is a layer 3 protocol that underlies the application layer in a layered communication system function model. The Session Initiation Protocol (SIP) in turn is an application-layer control protocol for
10 creating, modifying and terminating sessions with one or more participants. A user connected to a SIP based communication system may communicate with various entities of the communication system based on standardised SIP messages.

15 The global Internet has proven to be a popular and wide spread data communication system for provision of different services for the users thereof. The services are typically provided by the so called Internet Service Providers (ISPs). In addition to provision of the communication services itself
20 (i.e. the possibility to communicate via the system), content services such as different web sites are also provided. The content can have any form, such as various information, multimedia and so on.

25 One of the reasons why the Internet has become so popular is the possibility of the users to provide content that can then be viewed or otherwise used by other users. A widely used possibility for content creation is to use World Wide Web (WWW) content creation tools such as the Hypertext
30 Preprocessor (PHP). The content creation tools have been successfully implemented in numerous web server platforms,

and are used by numerous web sites in the Internet. The sites may use the tools to create for example dynamic web content.

The inventor has found that it could be advantageous if the
5 existing WWW service tools could be used for creating
services and/or other content for users of other
communication environments that are based on other protocols
than the HyperText Transfer Protocol (HTTP) of the WWW
service. For example, users of a Session Initiation Protocol
10 (SIP) based communication system might wish to create content
and/or services for other users communicating via the SIP
environment. A SIP service provider (e.g. an operator) may
also wish to utilise the creativity of its user base in
creating new services and other content, thereby making his
15 service more attractive. This might also free the SIP service
provider from the provision of a number of services and other
content. Instead, the service provider might concentrate on
to collectively provide a few basic, standard services
required for the operation of the communication system.
20 Running of powerful scripts on operator servers may also
create some security concerns.

Summary of the Invention

25 Embodiments of the present invention aim to address one or
several of the above problems.

According to one aspect of the present invention, there is
provided a method in a communication system, the method
30 comprising the steps of signalling from a requestor a request
for a service associated with an event, the request including

a first identifier for identifying the requested event and a second identifier for identifying the origin of the event, selecting an executable set of instructions based on the first and second identifiers, and controlling communications associated with the specific event by means of the selected executable set of instructions.

According to another aspect of the present invention there is provided a communication system, comprising means for provision of a user specific event, wherein a user equipment is enabled to request for a service associated with the user specific event by means of a request including a first identifier for identifying the event and a second identifier for identifying the means providing the user specific event, and a service execution environment for running an executable set of instructions for controlling communications associated with the user specific event, the set of executable instructions being selected based on the first and second identifiers.

According to a still other aspect of the present invention there is provided a service execution entity. The service execution entity comprises means for receiving a request for a service associated with a user specific event, said request including a first identifier for identifying the event and a second identifier for identifying the means providing the user specific event, means for selecting an executable set of instructions for controlling communications associated with the user specific event based on the first and second identifiers, and means for communicating messages to the user equipment.

In a more specific form the first identifier is mapped into executable sets of instructions during the selection. The selected executable set of instructions may be fetched from a storage means.

5

The requestor may subscribe to the event by generating a request by a user equipment and by transmitting the generated request from the user equipment to a server entity of the communication network. The request may expire after a defined
10 time.

The requestor may subscribe to the event by sending a SIP SUBSCRIBE message. Information may be transported from an entity executing said executable set of instructions in a SIP
15 NOTIFY message.

The executable set of instructions may be arranged for monitoring for a change in the state of the event. A message may be transmitted to the requestor in response to detection
20 of a change in the state of the event.

The second identifier may comprise an address of the origin of the event.

25 An event package may registered for the event in an event package directory.

The set of executable instructions may subscribe to another event.

30

The embodiments of the invention may provide an easy to implement way of communicating upon request information that

- associates with user specific events. A service architecture may be provided that leverages on the resources of the open source community in creating new service concepts and/or in provisioning of content for users of a communication system.
- 5 Existing service creation tools may be used for creating services and/or other content.

Brief Description of Drawings

- 10 For better understanding of the present invention, reference will now be made by way of example to the accompanying drawings in which:

Figure 1 shows a communication system wherein the present invention can be applied;

- 15 Figure 2 shows one embodiment of the present invention; and

Figure 3 is a flowchart illustrating the operation of one embodiment of the present invention.

20 Description of Preferred Embodiments of the Invention

- Reference is made to schematic block diagram of Figure 1. User equipment 18 may be in communication with respective wireless interfaces with servers 10, 12 and 14 of a first communication system 9. The first communication system is arranged to operate in a Session Initiation Protocol (SIP) environment. That is, each of the users 18 subscribes to a communication system that is based on the SIP protocol and is served by a SIP service provider. In a typical arrangement
- 25 the SIP service provider operates the SIP network servers.
- 30

The SIP is an application-layer control protocol for creating, modifying and terminating sessions with one or more participants. A feature of the SIP is that since it operates on the application level it is not dependent on a particular transport layer protocol. The SIP can thus use various transport protocols. Examples of the possible protocols include the UDP (User Datagram Protocol), TCP (Transmission Control Protocol), and the SCTP (Stream Control Transmission Protocol). SIP is not dependent on any other of the protocols of the underlying layers either, such as the layer 3 IP or the layer 2 technologies such as the WLAN, LAN, PPP, avian carriers and so on.

The user equipment 18 may communicate with the various entities 10, 12, and 14 of the communication system based on SIP standard messages. The entities may comprise entities such as a SIP proxy server 10, a service execution environment 12, and a presence server 14.

For example, the presence server can be used for provision of the so called 'presence' service. In short, the presence service is a service that is arranged to provide those who have subscribed to the service with information regarding the presence status of a specific subscriber. The presence service has proven to be, at least at the present, a substantially popular SIP service. The presence service may be used by a SIP user, for example, to check the status of a person he wishes to make a call before even trying to establish a call connection. A more detailed description of the presence service can be found from 3rd Generation Partnership Project (3GPP) Technical specification 3GPP TS 22.141 'Presence Service' (version 1.0.0. 2001-06).

The elements required for the connection between the network apparatus of the first communication system 10 and the user equipment 18 and the user equipment as such do not form an essential element of the present invention, and therefore these are not shown or described in any greater detail. It is sufficient to note that e.g. mobile stations may communicate with base stations of a cellular communication system over a wireless interface. The mobile stations may be provided with user interface means such as a display and input or control buttons, although this is not always necessary. A mobile station may comprise also processor and data storage means for enabling use thereof for data communication operations. It shall be appreciated that although Figure 1 shows mobile user equipment 18 for communication via the SIP environment 9, user equipment may interface the SIP environment 9 via a fixed connection.

Figure 1 shows also a second communication system 8 that operates in accordance with a second protocol, and more particularly, in accordance with the internet protocol (IP). An internet service provider (ISP) entity 20 is shown to be provided in the IP environment 8. An Internet enabled terminal, and more particularly, a personal computer (PC) terminal 19 is shown to be connected to the Internet 8.

Reference is now also made to schematic block diagram of Figure 2 showing the overall structure of a service platform embodying the present invention. A user 18 is shown to be in communication with a SIP proxy server entity 10 and a service execution environment 12 based on the Session Initiation Protocol (SIP) standard messages.

In the Session Initiation Protocol (SIP) standard messages and/or requests can be communicated between any SIP enabled entities. For example, a user may use the so called SIP
5 subscribe/notify mechanism to subscribe to certain events by transmitting a SIP 'SUBSCRIBE' message. The occurrence of these events is then reported to the user with a SIP NOTIFY message. Those interested may find a more specific description of the SIP subscribe mechanism e.g. from the
10 specifications by IETF (Internet Engineering Task Force) that relate to SIP events.

In addition, a file storage system 16 is also shown. The arrangement is such that the service execution environment 12
15 may fetch selected data, and more particularly a selected executable set of instructions from the file storage system 16. The data fetching operations will be described in more detail later.

20 The capability of the SIP subscribe/notify mechanism to report events that associate with a particular user can be advantageously used in provision of services that associate with an event which in turn associates with said user. The embodiments described below enable communication of data that
25 associates with user specific events to other users. In a preferred embodiment the SIP subscribe/notify mechanism is used for subscribing and reporting the user specific events.

The term event shall be understood to refer to any event that
30 may be present in the communication system. For example, an event may comprise a dynamic or static mark up language document (e.g. a HTML (Hypertext Markup Language) or XML

(Extensible Markup Language) document), or any other entity that may change its state and may associate with a user of the communication system.

5 A feature of the SIP is the communication of the so called SIP event packages and sub-packages. An SIP event package refers to an data entity that is defined for an event. An event package defines a set of state applied to a specific type of resource, such as the user presence, call state,
10 messaging mailbox state and so on. The set of state may be, for example, statistics, access policy, subscriber lists and so on. The sub-packages in turn can be seen as being a special type of the event packages. A sub-package defines a set of state that can be applied to event packages. A sub-
15 package may also be applied to other sub-packages. With regard to the nature of the event packages and sub-packages a reference can be made to the object oriented analogy.

The event package names may, for example, have the following
20 form: `'service.username.home.nokia.com'`. The name of the package could then be used in mapping the event directly to the home directory of "username", and therefore to a script called `'~username/public_sipevents/service.php'` in said directory. According to another example, an event called
25 `'foo'`, the event package name for an organisational domain name `'nokia.com'` could be `'foo.nokia.com'`. Hence, someone sending a SUBSCRIBE request "Event: foo.nokia.com" would receive a NOTIFY message whenever there is a change in the
"foo" state.

30

Figure 2 is an example of the operation showing the following messages and steps:

1. Subscription from a user equipment 18 is received at a proxy server 10. The SIP 'SUBSCRIBE' request may originate from a user equipment 18 such as a mobile station or a fixed line computer terminal.
2. The event-header of the request is parsed at the proxy server 10. That is, the event header is examined to see what has been subscribed (i.e. to find the name of the subscribed event).
3. If it is detected that the request contains an event package, the request and the event package is passed into scripting function at the service execution environment 12. If the request is detected to be standard package, the request/package may be to an appropriate server (e.g. the presence server 14 of Figure 1).
4. If the request contained an event package, a script associated with the event package is fetched from the storage means 16. This may be accomplished in a manner that is similar to operation of web pages. That is, a user may have a home directory in a file system, and a directory called "~/public_events/" contains php-scripts corresponding directly to these events. For example, an event called "foobar" is subscribed from address sip:aki.niemi@nokia.com, a script called "/home/sipusers/aki.niemi/public_events/foobar.php" is searched for subsequent execution. If the script is invalid or not found, the server may respond e.g. with a SIP standard message "489 Bad event".
5. The script is executed at the service execution environment 12 to monitor any state changes in the subscribed event. If a state change is detected, a SIP

'NOTIFY' message is created and transmitted to the user equipment 18.

The script lifetime may be limited for the subscribed event.
5 This may be done e.g. by setting an expiry parameter in the subscribe request (e.g. an expire-header value in the SIP).

The event packages for specifics event are preferably registered through a centralised authority. For example, an
10 authority such as the IANA (Internet Assigned Numbers Authority) may provide event packages management service.

With the service architecture described with reference to Figure 2, users could create event packages directly, e.g. by
15 means of the PHP scripting. The user may also publish these packages (with descriptions) on a web page, in catalogues and so on. For example, a HTML code can contain a link such as href="sip:aki.niemi@nokia.com;methods="SUBSCRIBE"; Event="foobar". In other words, the event names may be in
20 public domain, that is any user may subscribe to an event (e.g. a document) that is publicly announced as being available.

Provision of a feature may also be accomplished by mapping a
25 proprietary event package name to a server side scripting environment. The proprietary event may be defined as an event that is relevant only to the subscriber of the event and/or the provider of the subscribed event.

30 The scripting environment can be provided by tools such as a Hypertext Preprocessor (PHP) entity, Perl, CGI or any other

appropriate technology offering possibility to execute a set of instructions such as a script.

As shown in the Flowchart of Figure 3, a user specific event
5 has been created by a user. The name of the event is registered at a central name registry entity, such as the IANA. The user specific event is provided for other users who send a SUBSCRIBE message carrying a user specific event identifier i.e. an event package relating to the event. The
10 SUBSCRIBE message may also carry other information such as indication of the accepted NOTIFY payload type in an Accept header.

Upon reception at the service execution environment the
15 identifier is mapped by the service execution environment into a script that handles the reporting of such events. The script is adapted to make a decision when to send a NOTIFY message. The decision may be based on any appropriate factors and information from various information sources. For
20 example, external servers may provide information to support the decision making.

Such an external source could be a database in association e.g. with a calendar application. A supervising entity in
25 association with the calendar application can then issue event information towards the presence server in response to occurrence of said event.

An embodiment provides a service architecture wherein
30 ordinary SIP users 18 could initiate creation and publishing of personal event packages in a manner that is from the user's point of view substantially similar to the maintenance

of a personal web page at an Internet Service Provider's web server 20. Content creation tools that are originally intended for use in a different communication environments may be used in the embodiments. For example, the PHP that is
5 conventionally implemented in the HTTP environment 8 may be utilised for provision of content in the SIP environment.

In accordance with a further embodiment information concerning the type of the user's subscription that is
10 carried in the SUBSCRIBE request is mapped to an identifier of the service that supervises the service provisioning. The requested subscription type may be translated by the presence server into the identifier of the supervising entity. The supervising entity may then be invoked to be aware of the
15 subscription made to its supervision activity. After being invoked the supervising entity may push notifications duly to the presence server. Thus the script executing the event can in fact act as a wrapper, or proxy, and itself subscribe to another event. The NOTIFYs from that event may then be simply
20 relayed back to the original subscriber. This may be accomplished transparently to the subscriber of the event.

The above embodiments may require a combination of features of the SIP and a service execution environment, e.g. the PHP.
25 Thus a SIP-PHP mechanism may need to be specified. Necessary SIP-PHP functions and SIP modules may also need to be made available for the SIP servers. The rest of the implementation work is, however, setting up an execution environment similar to that used by a number of the existing HTTP web servers
30 today. Examples of commercially available execution environments include the Apache™.

Various different service applications may be provided by the embodiments. The embodiments benefit from the use of the already existing SIP subscribe/notify mechanism for new tasks.

5

In accordance with a further embodiment proprietary event packages may be defined using an organisational domain name but in reverse order. For example, for an event called 'foo', the event package name for an organisational domain name
10 'nokia.com' could be 'com.nokia.foo'. Hence, someone sending a SUBSCRIBE request "Event: com.nokia.foo" would receive a NOTIFY message whenever there is a change in the "foo" state.

It should be appreciated that whilst embodiments of the
15 present invention have been described in relation to mobile stations, embodiments of the present invention are applicable to any other suitable type of user equipment.

It is also noted herein that while the above describes
20 exemplifying embodiments of the invention, there are several variations and modifications which may be made to the disclosed solution without departing from the scope of the present invention as defined in the appended claims.

Claims

1. A method in a communication system, comprising:
 signalling from a requestor a request for a service
5 associated with an event, the request including a first
 identifier for identifying the requested event and a second
 identifier for identifying the origin of the event;
 selecting an executable set of instructions based on the
first and second identifiers; and
10 controlling communications associated with the specific
event by means of the selected executable set of
instructions.
2. A method as claimed in claim 1, wherein the first
15 identifier is mapped into executable sets of instructions
during the selection.
3. A method as claimed in claim 1 or 2, wherein the
selected executable set of instructions is fetched from a
20 storage means.
4. A method as claimed in any preceding claim, wherein the
executable set of instructions comprises a script.
- 25 5. A method as claimed in any preceding claim, wherein the
requestor subscribes to the event by generating the request
by a user equipment and by transmitting the request from the
user equipment to a server entity of the communication
network.
30
6. A method as claimed in claim 5, wherein the requestor
subscribes to the event by sending a SIP SUBSCRIBE message.

7. A method as claimed in any preceding claim, wherein information is transported from an entity executing said executable set of instructions in a SIP NOTIFY message.

5

8. A method as claimed in any preceding claim, wherein the executable set of instructions monitors for a change in the state of the event.

10 9. A method as claimed in claim 8, wherein a message is transmitted to the requestor in response to detection of a change in the state of the event.

10. A method as claimed in any of the preceding claims,
15 wherein content is communicated to the requestor.

11. A method as claimed in any preceding claim, wherein the second identifier comprises an address of the origin of the event.

20

12. A method as claimed in any preceding claim, wherein the first identifier is included in the header of the request.

13. A method as claimed in any preceding claim, wherein the
25 request expires after a defined time.

14. A method as claimed in any preceding claim, comprising registering of an event package for the event in an event package directory.

30

15. A method as claimed in any preceding claim, wherein the set of executable instructions subscribes to another event.

16. A communication system, comprising:

means for provision of a user specific event, wherein a user equipment is enabled to request for a service associated with the user specific event by means of a request including a first identifier for identifying the event and a second identifier for identifying the means providing the user specific event; and

a service execution environment for running an executable set of instructions for controlling communications associated with the user specific event, the set of executable instructions being selected based on the first and second identifiers.

17. A communication system as claimed in claim 16, wherein the request is transmitted by means of a SIP subscribe request.

18. A communication system as claimed in claim 16 or 17, wherein information is transported from the service execution environment in a SIP NOTIFY message.

19. A service execution entity, comprising:

means for receiving a request for a service associated with a user specific event, said request including a first identifier for identifying the event and a second identifier for identifying the means providing the user specific event;

means for selecting an executable set of instructions for controlling communications associated with the user specific event based on the first and second identifiers; and means for communicating messages to the user equipment.

1 / 2

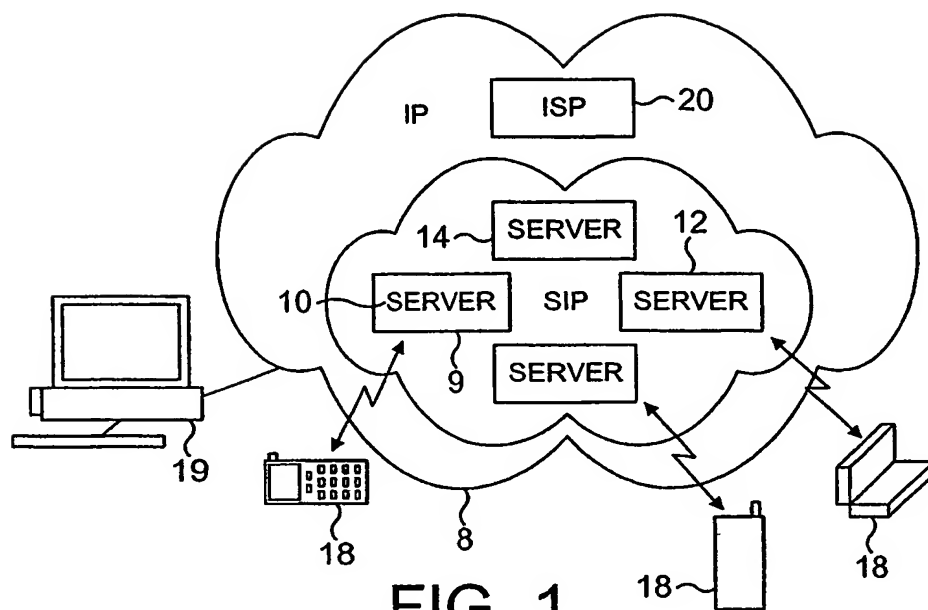


FIG. 1

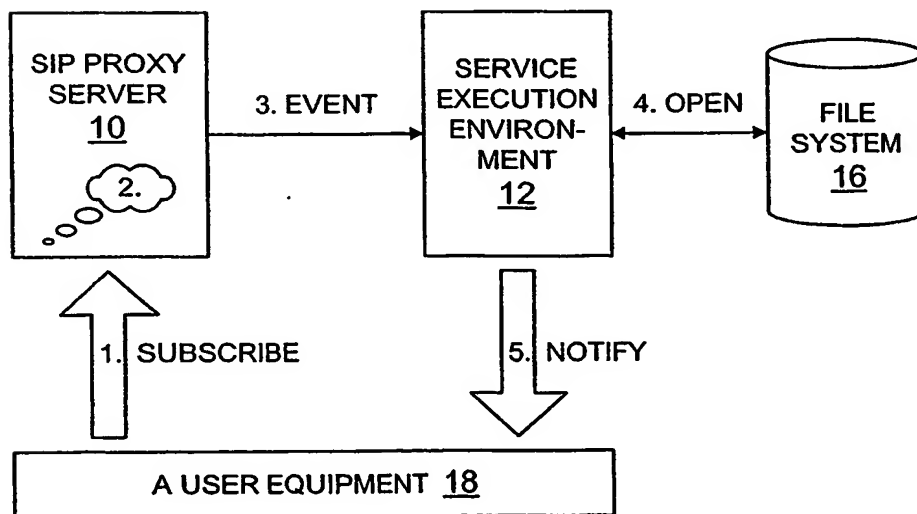


FIG. 2

2 / 2

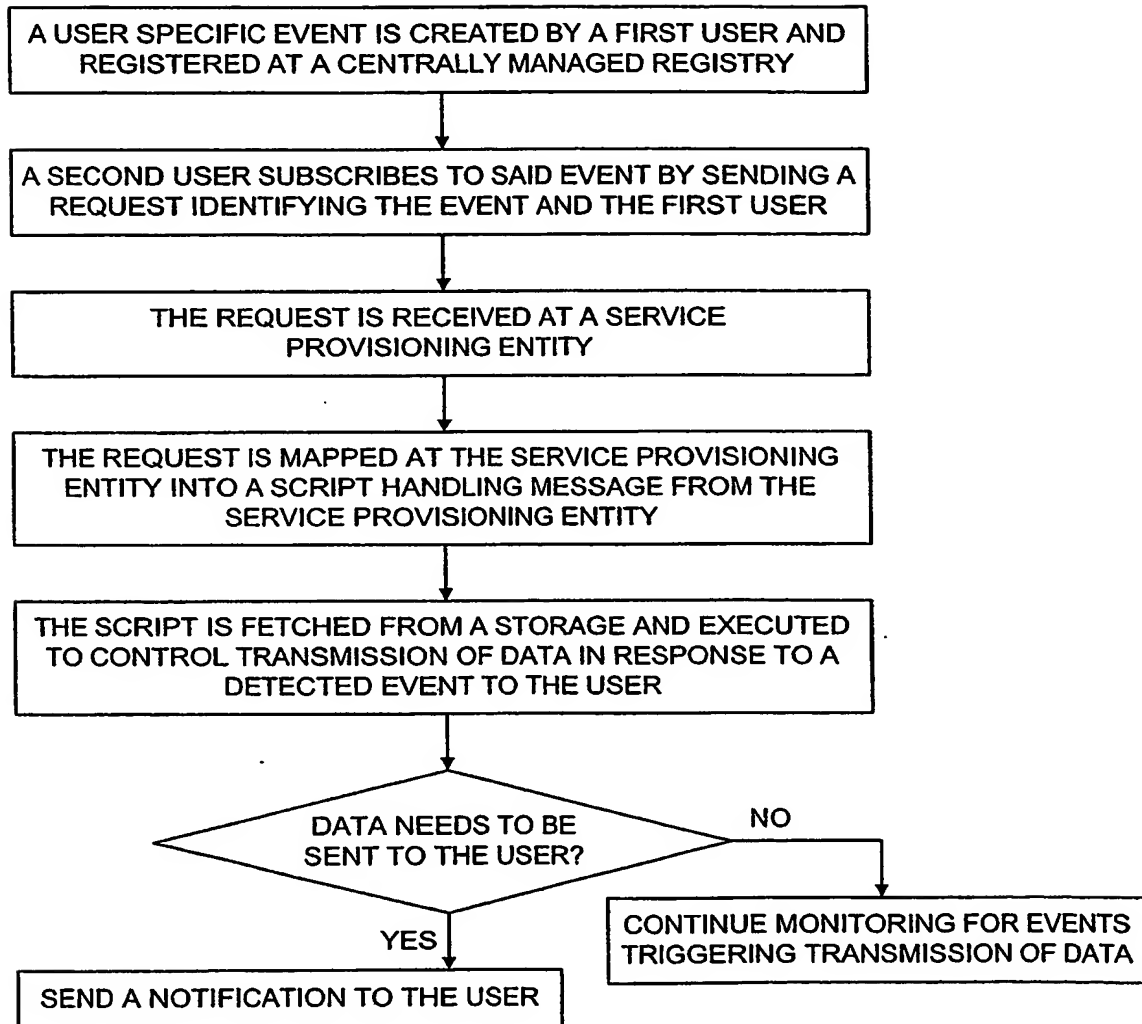


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 02/04566

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>BHATIA S; NIEMI A: "PHP: Hypertext Preprocessor for SIP" IETF INTERNET DRAFT, July 2001 (2001-07), pages 1-8, XP002189883 * sections 3, 4 and 5 *</p>	1-19
X	<p>EP 1 096 766 A (NORTEL NETWORKS LTD) 2 May 2001 (2001-05-02) abstract paragraph '0001! - paragraph '0007! paragraph '0017! - paragraph '0043! paragraph '0059! paragraph '0063! - paragraph '0071! paragraph '0076! paragraph '0110!</p>	1-4, 6-12, 19
A		5, 14-16
	-/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

3 February 2003

Date of mailing of the international search report

10/02/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Kesting, V

INTERNATIONAL SEARCH REPORT

Internat. Application No.

PCT/IB 02/04566

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	ROSENBERG J ET AL: "PROGRAMMING INTERNET TELEPHONY SERVICES" IEEE NETWORK, IEEE INC. NEW YORK, US, vol. 13, no. 3, May 1999 (1999-05), pages 42-49, XP000870630 ISSN: 0890-8044 * the entire document *	1-19
Y	ROACH A: "SIP-Specific Event Notification" IETF INTERNET DRAFT, July 2001 (2001-07), pages 1-32, XP002189884 abstract * sections 2, 3, 4.1, 4.2, 5.1.3, 5.1.5.1, 5.1.6, 5.2, 7 *	1-19
A	ROSENBERG ET AL.: "SIP Extensions for Presence" IETF INTERNET DRAFT, 2 March 2001 (2001-03-02), pages 1-39, XP002189885 abstract * sections 1, 3, 5.1-5.4, 5.8, 6.1, 10.3 *	1,5-19
A	EP 1 100 280 A (NORTEL NETWORKS LTD) 16 May 2001 (2001-05-16) abstract paragraph '0027! - paragraph '0028! paragraph '0035! - paragraph '0036! paragraph '0039! paragraph '0042! paragraph '0046! - paragraph '0061! paragraph '0069! - paragraph '0070! paragraph '0072! - paragraph '0074! figures 1-7	1-8,11, 15
A	WO 01 47212 A (NORTEL NETWORKS LTD ; SOLLEE PAT (US); JESSEN CHRISTOPHER (US)) 28 June 2001 (2001-06-28) page 4, line 21 -page 5, line 31 page 7, column 3, line 15 claim 8	1,5-11, 13,15-19

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB 02/04566

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1096766	A	02-05-2001	EP 1096766 A2	02-05-2001
EP 1100280	A	16-05-2001	EP 1100280 A2	16-05-2001
			EP 1102498 A2	23-05-2001
WO 0147212	A	28-06-2001	AU 3436201 A	03-07-2001
			EP 1243117 A2	25-09-2002
			WO 0147212 A1	28-06-2001

Form PCT/ISA/210 (patent family annex) (July 1992)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 April 2003 (17.04.2003)

PCT

(10) International Publication Number
WO 03/032606 A1

(51) International Patent Classification⁷: **H04L 29/06**

(21) International Application Number: PCT/IB02/04566

(22) International Filing Date: 7 October 2002 (07.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0124261.9 9 October 2001 (09.10.2001) GB

(71) Applicant (for all designated States except US): **NOKIA CORPORATION [FI/FI]**; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NIEMI, Aki [FI/FI]**; Otsolahdentie 18 A 26, FIN-02110 Espoo (FI).

(74) Agents: **WILLIAMS, David, John et al.**; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- with amended claims

Date of publication of the amended claims: 5 June 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **EVENT RELATED COMMUNICATIONS**

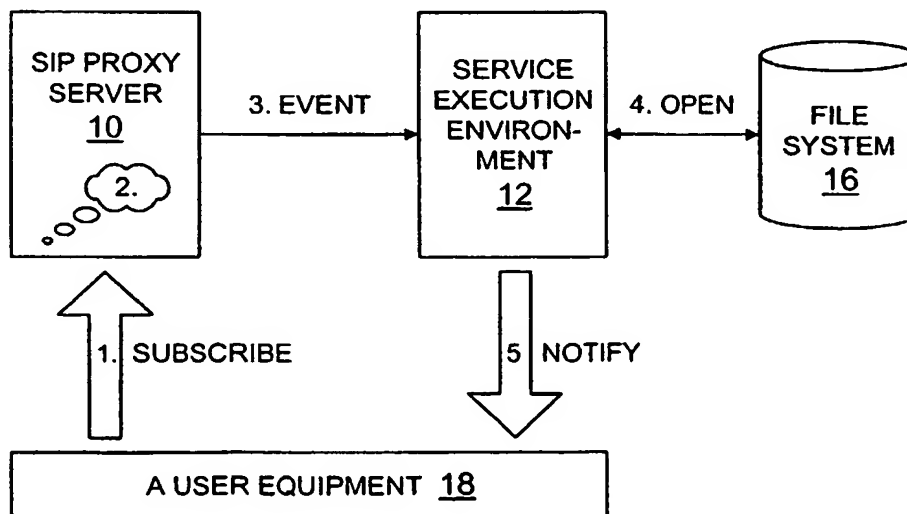

(57) Abstract: A method in a communication system wherein a requestor (18) signals a request (1) for a service associated with an event. The request includes a first identifier for identifying the requested event and a second identifier for identifying the origin of the event. An executable set of instructions is then selected based on the first and second identifiers. Communications associated with the specific event is then controlled by means of the selected executable set of instructions. A communication system and a service execution entity (12) operating in accordance with the method is also disclosed.

AMENDED CLAIMS

[received by the International Bureau on 1 April 2003 (01.04.2003);
original claim 1 amended; remaining claims unchanged (1 page)]

1. A method in a communication system, comprising:
 signalling from a requestor a request for a service
5 associated with a user specific event, the request including
 a first identifier for identifying the requested event and a
 second identifier for identifying the origin of the event;
 selecting an executable set of instructions based on the
first and second identifiers; and
10 controlling communications associated with the user
specific event by means of the selected executable set of
instructions.
2. A method as claimed in claim 1, wherein the first
15 identifier is mapped into executable sets of instructions
during the selection.
3. A method as claimed in claim 1 or 2, wherein the
selected executable set of instructions is fetched from a
20 storage means.
4. A method as claimed in any preceding claim, wherein the
executable set of instructions comprises a script.
- 25 5. A method as claimed in any preceding claim, wherein the
requestor subscribes to the event by generating the request
by a user equipment and by transmitting the request from the
user equipment to a server entity of the communication
network.
30
6. A method as claimed in claim 5, wherein the requestor
subscribes to the event by sending a SIP SUBSCRIBE message.